


Taraflex® Surface



- 1 Triple Action ProtecSol® surface treatment
- 2 Embossed calendared surface layer
- 3 Recycled calendared surface backing

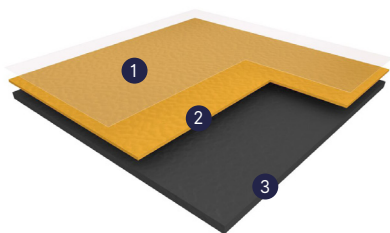

TARAFLEX®: THE REFERENCE SINCE 1947

Description

The ideal floor for heavy duty multipurpose usage and rolling sports.

- **High resistance to indentation:** an ideal solution for multipurpose usage
- **Meets EN 14904:** when installed on sub-construction (A3/A4 category)
- **Triple-Action ProtecSol® surface treatment:** a surface with no risk of burns, easy and economical to maintain

🔧 Installation: Glue down

🔊 Acoustics: 3 dB

🔥 Fire rating: Bfl-s1

🕒 15 years warranty

Sustainability



Best in class carbon footprint



88%
Biocontent, Mineral & Recycled



100% Recyclable



Made in Europe (France)

Customise your floor to match the latest trends!

A wide range of colours and realistic designs:



World's most used surface for international sport events

International Federation Certifications



Possibility to customise the colours and designs upon request

Technical Data Sheet

Description	Standard	Requirement	Units	Results
Surface treatment	-	-	-	Triple Action ProtecSol®
Surface complex	-	-	-	D-Max™
Thickness	EN ISO 24346	-	mm	2
Weight	EN ISO 23997	-	kg/m²	2.7
Length	EN ISO 24341	-	lm	26.5 max
Width	EN ISO 24341	-	lm	1.5
Sustainability				
Recycled content	-	-	%	58
Phthalate-free	-	-		Yes
Recyclability	-	-	%	100
Sport properties				
Shock absorption	EN 14808	≥ 35	%	-
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 2
Sliding coefficient	EN 13036-4	80 - 110	-	80 - 110
Ball bounce	EN 12235	≥ 90	%	≥ 90
Technical characteristics				
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
Impact sound insulation	EN ISO 717 -2	-	dB	3
Classification				
Fire	EN 13501-1	-	-	Cfl-s1
Anti-bacterial activity (1) (E. coli - S. aureus - MRSA)	ISO 22196	-	-	> 99% inhibits growth
Antiviral activity	ISO 21702	-	-	99.4% efficiency after 2h
Declaration of performance				
CE	DOP-005-1002-A	-	-	Fire Sliding Coefficient Abrasion Resistance Rolling Load Resistance

(1) The implementation of an effective cleaning method is the best defence against infection.

Others certifications:

