


Taraflex® Performance SL



- 1 Taraflex® Performance with reinforced textile backing
- 2 Tarafix SL high-quality holding strip
- 3 Concrete slab

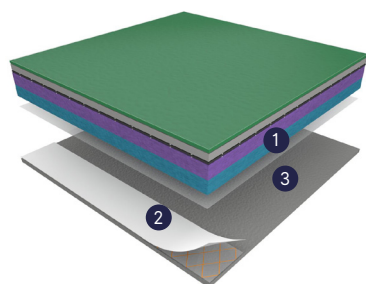

TARAFLEX®: THE REFERENCE SINCE 1947

Description

No glue, no compromise! Even on damp subfloors.

- **P2 sports class:** high performance and player safety
- **Triple-Action ProtecSol® surface treatment:** a surface with no risk of burns, easy and economical to maintain
- **Unique exceptional bonding between textile backing and Tarafix SL holding strip:** same quality as glued Taraflex
- **Resists to humidity rises:** solution for damp subfloors, no need to install vapor barriers

- ✂ Installation: Adhesive-free
- 🔊 Acoustics: 20 dB
- 🔥 Fire rating: Cfl-s1
- 🕒 15 years warranty

Sustainability

SUSTAINABLE ADHESIVE FREE INSTALLATION

- Eliminating adhesives improves laying comfort and indoor air quality for installers and users
- Reduce the installation time

EASY RECYCLING

- Eco-design: SL textile fibers are composed of recycled plastic bottles



- Can easily be reused* or recycled



UNBEATABLE QUALITY & PERFORMANCE

- Same level of quality and performance as traditionally adhered Taraflex®
- High resistance to all sports demands
- Compliant with sub floors with up to 7% of humidity



Best in class carbon footprint



73%
Biocontent, Mineral & Recycled



100% Recyclable



Made in Europe (France)

Customise your floor to match the latest trends!

A wide range of colours and realistic designs:



Possibility to customise the colours and designs upon request

Technical Data Sheet

Description	Standard	Requirement	Units	Results
Surface treatment	-	-	-	Triple Action Protecso®
Surface complex	-	-	-	D-Max™
Foam	-	-	-	CXP-HD™
Thickness	EN ISO 24346	-	mm	9.35
Weight	EN ISO 23997	-	kg/m²	5.2
Length	EN ISO 24341	-	lm	26.5 max
Width	EN ISO 24341	-	lm	1.5
Sustainability				
Recycled content	-	-	%	26
Phthalate-free	-	-		Yes
Recyclability	-	-	%	100
Sport properties				
Shock absorption	EN 14808	≥ 35	%	P2
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 3
Sliding coefficient	EN 13036-4	80 - 110	-	80 - 110
Ball bounce	EN 12235	≥ 90	%	≥ 90
Technical characteristics				
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
Impact sound insulation	EN ISO 717 -2	-	dB	20
Classification				
Fire	EN 13501-1	-	-	Cfl-s1
Anti-bacterial activity (1) (E. coli - S. aureus - MRSA)	ISO 22196	-	-	> 99% inhibits growth
Antiviral activity	ISO 21702	-	-	99.4% efficiency after 2h
Declaration of performance				
CE	DOP-005-1047	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling Load Resistance

(1) The implementation of an effective cleaning method is the best defence against infection.

Others certifications:



International Federation Certifications:

