


Taraflex® Multi-Use



- ① Triple Action ProtecSol® surface treatment
- ② Wear layer
- ③ Printed design layer
- ④ Recycled calendered backing
- ⑤ D-Max™ reinforced fiberglass grid
- ⑥ CXP-HD+™ foam technology

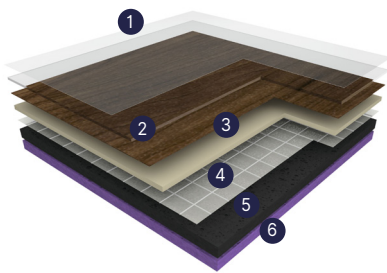

TARAFLEX®: THE REFERENCE SINCE 1947

Description

The combination of durability, impact resistance, and performance: ideal for sports and multi-purpose use.

- **P1 sports class:** high performance and safety for the players
- **CXP-HD+™ foam:** great sport performances and high indentation resistance
- **Triple-Action ProtecSol® surface treatment:** a surface with no risk of burns, easy and economical to maintain
- **D-Max™ reinforcement with fibre-glass grid:** high durability and outstanding dimensional stability

🔪 Installation: Glue down

🔊 Acoustics: 19 dB

🔥 Fire rating: Cfl-s1

🕒 15 years warranty

Sustainability



Best in class carbon footprint



82%

Biocontent, Mineral & Recycled



100% Recyclable



Made in Europe (France)

Customise your floor to match the latest trends!

A wide range of colours and realistic designs:



Possibility to customise the colours and designs upon request

World's most used surface for international sport events

International Federation Certifications



Technical Data Sheet

Description	Standard	Requirement	Units	Results
Surface treatment	-	-	-	Triple-Action Protecso®
Surface complex	-	-	-	D-Max™
Foam	-	-	-	CXP-HD+™
Thickness	EN ISO 24346	-	mm	6.2
Weight	EN ISO 23997	-	kg/m²	4.2
Length	EN ISO 24341	-	lm	26.5 max
Width	EN ISO 24341	-	lm	1.5
Sustainability				
Recycled content	-	-	%	38
Phthalate-free	-	-		Yes
Recyclability	-	-	%	100
Sport properties				
Shock absorption	EN 14808	≥ 35	%	P1
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 2
Sliding coefficient	EN 13036-4	80 - 110	-	80 - 110
Ball bounce	EN 12235	≥ 90	%	≥ 90
Technical characteristics				
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
Impact sound insulation	EN ISO 717 -2	-	dB	19
Classification				
Fire	EN 13501-1	-	-	Cfl-s1
Anti-bacterial activity (1) (E. coli - S. aureus - MRSA)	ISO 22196	-	-	> 99% inhibits growth
Antiviral activity	ISO 21702	-	-	99.4% efficiency after 2h
Declaration of performance				
CE	DOP-005-1041-A	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling Load Resistance

(1) The implementation of an effective cleaning method is the best defence against infection.

Others certifications:

