



Tarasafe

Standard - H₂O - Ultra

Ultra H₂O - Super

Gerflor®

Tarasafe Safety Floorings

Performances



Non-absorbent, watertight and waterproof



Resistant to high traffic



Wear group

Excellent abrasion resistance



Resistant to impact, heavy loads, indentation

Installation



Light and easy to handle



Flexible and easy to install



Easier to cut

Maintenance

SparClean®

Treated

Very low maintenance needed

It is not necessary to seal the floor during its lifetime

Eco-responsible solutions




Excellent indoor air quality



**Raw and recycled materials
100% REACH compliant**



An innovative corner system

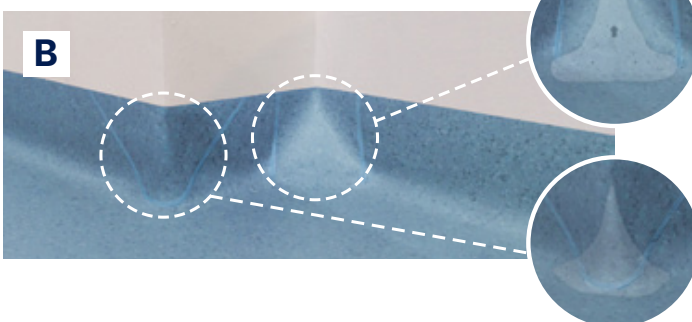


Gerflor's Clean Corner System is a patent pending, innovative corner solution which is supported by years of research and development (system is only available with Gerflor floors). With ultra-resistant and versatile profiles (picture A) **Clean Corner System** can be used for all your projects with a perfect result (picture B).

- ① External angle is covered by the respective patent applications: WO2016/005695 A1, FR3023313
- ② Internal angle is covered by the French pending patent application FR3013065



Tarasafe Standard

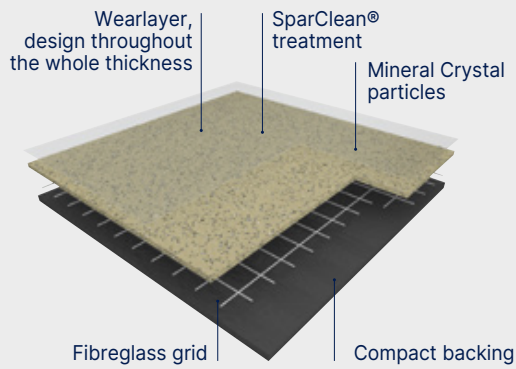


R10
Slip Resistant

P4
Slip Resistant

T
Wear group

SparClean®
Treated

Tarasafe H₂O

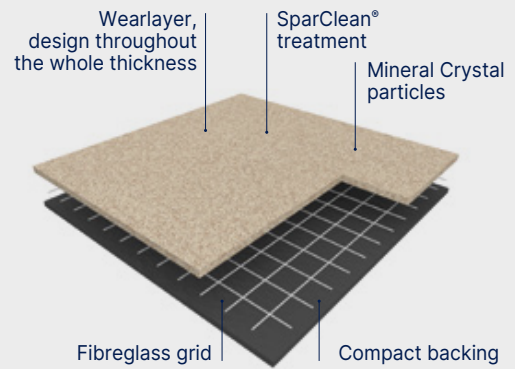

R11
Slip Resistant


P5
Slip Resistant

T
Wear group

SparClean®
Treated

 Suitable for both barefoot and shod use

Tarasafe Ultra

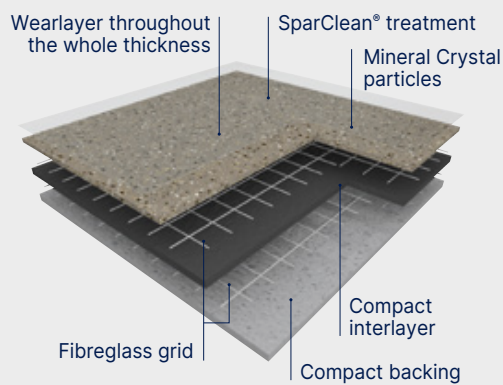


R10
Slip Resistant

P4
Slip Resistant

T
Wear group

SparClean®
Treated

Tarasafe Ultra H₂O

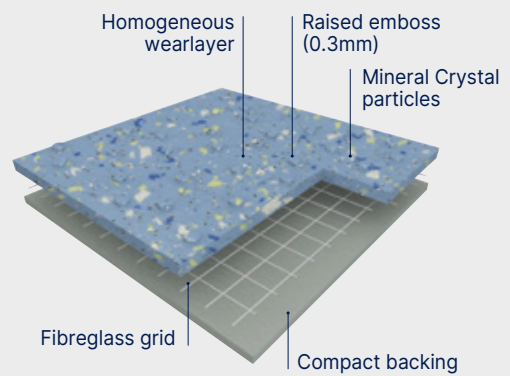


R11
Slip Resistant

P3
Slip Resistant

P
Wear group

 Suitable for both barefoot and shod use

Tarasafe Super



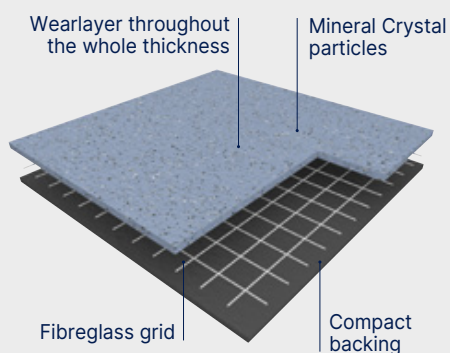


R12
Slip Resistant


P5
Slip Resistant

T
Wear group


Tarasafe Ultra H₂O

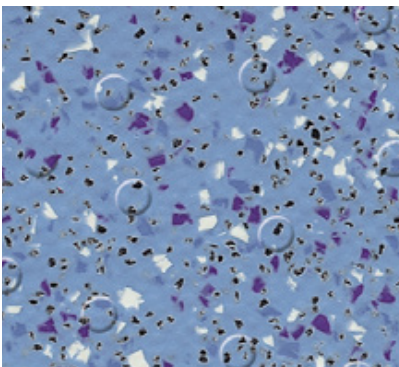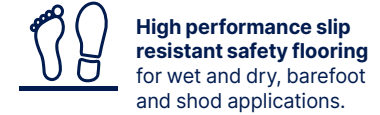


7413 Ocean Blue
NCS: 3030-R90B / LRV: 31.8

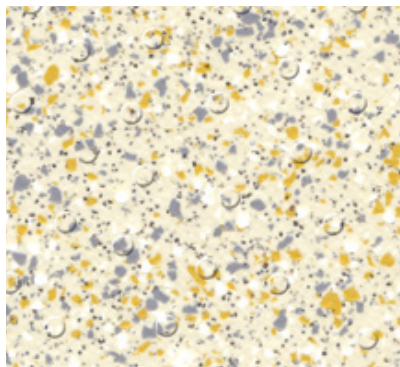


7325 Seashore
NCS: 1005-Y20R / LRV: 63.0

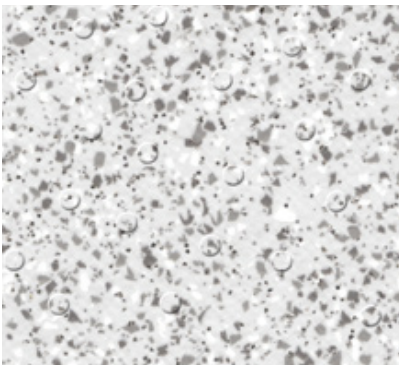

7720 Iceberg
NCS: 1500-N / LRV: 60.6

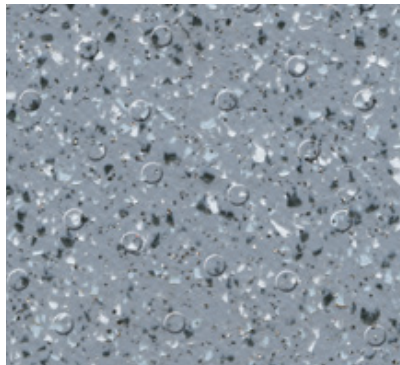

7746 Stone
NCS: 5502-B / LRV: 23.6

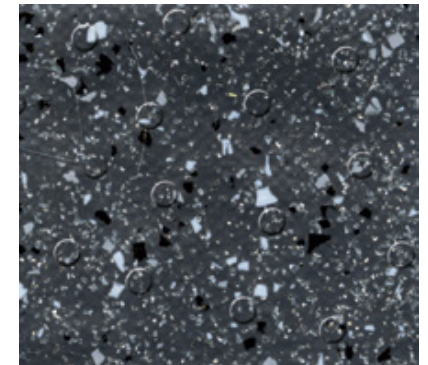

7732 Gravel
NCS: 7502-B / LRV: 9.7



Tarasafe Ultra



Compact sheet



Heavy traffic



R10

Slip Resistant

P4

Slip Resistant

SparClean®

Treated



Matte finish

Matte surface finish for an improved design experience



Easier to install, lighter & more flexible to handle



Easier to cut – up to 5 x more blade life




Wear group


High resistance to heavy traffic




Contains 29% recycled content
100% recyclable

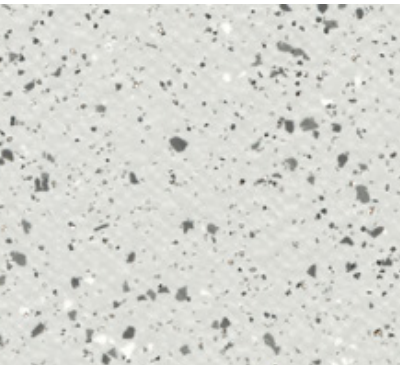


8701 Opal
NCS: 1500-N / LRV: 59.1

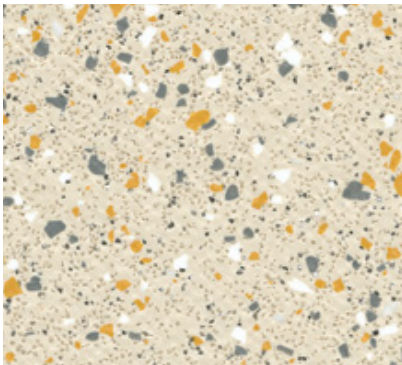


7383 Diopside
NCS: 1005-Y20R / LRV: 59.6

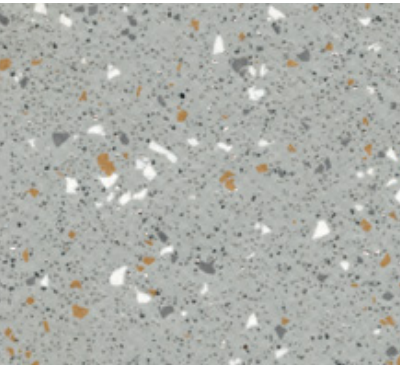


8704 Pebble
NCS: 3000-N / LRV: 44.1

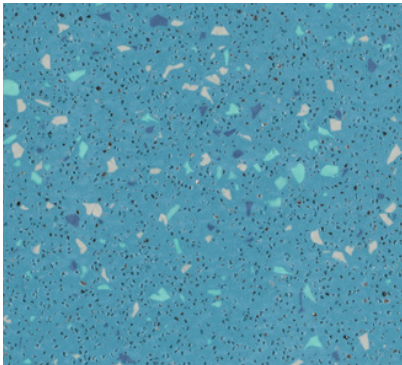

2432 Larimar
NCS: 3030-B10G / LRV: 26.3

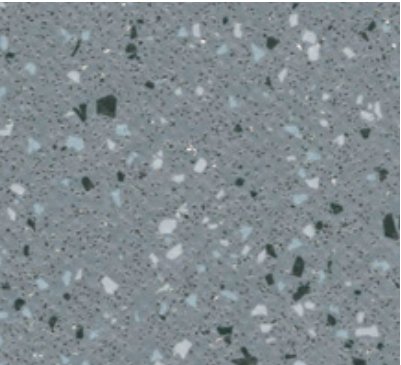


8709 Granite
NCS: 5502-B / LRV: 25.4

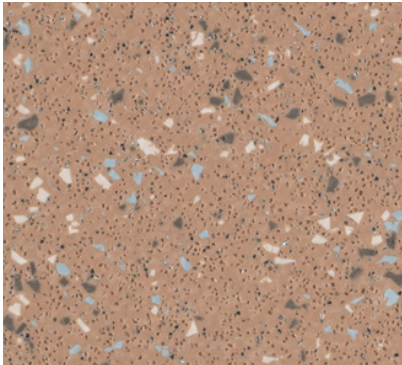


3183 Bauxite
NCS: 4010-Y50R / LRV: 28.3




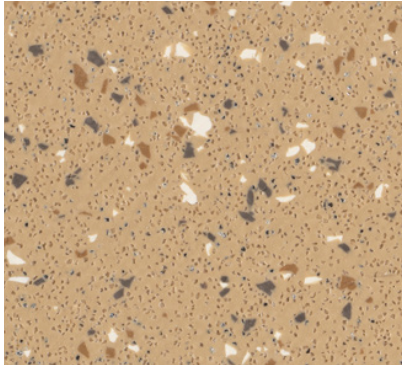


6088 Andalusite
NCS: 3020-Y40R / LRV: 35.9

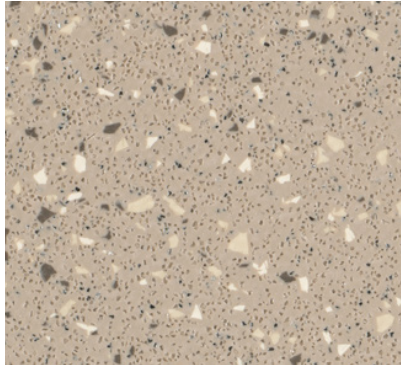


6348 Clay
NCS: 3005-Y20R / LRV: 38.7

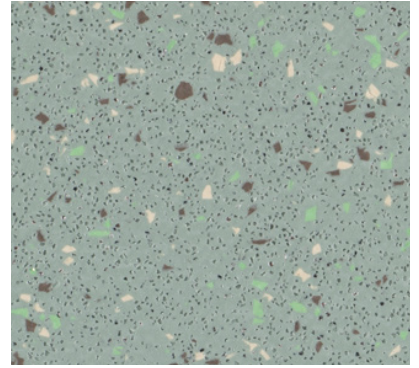


6591 Serpentine
NCS: 3010-G / LRV: 32.4

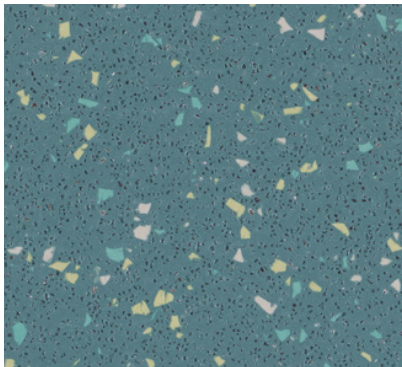


6593 Epidote
NCS: 5020-B30G / LRV: 19.1

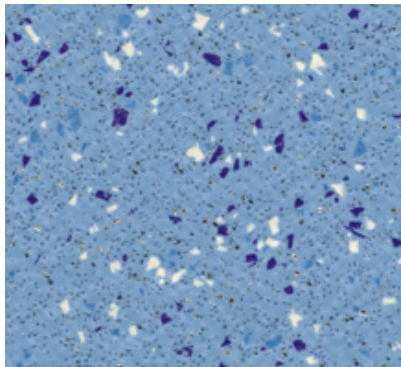


7482 Halite
NCS: 3030-R90B / LRV: 31.8

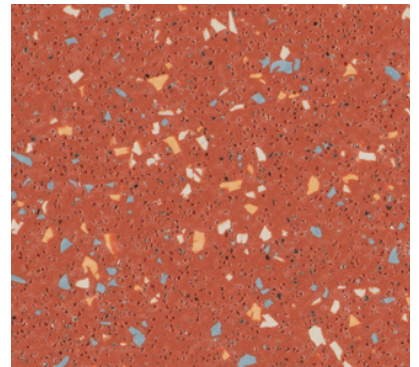


7307 Copper
NCS: 4040-Y80R / LRV: 18.5

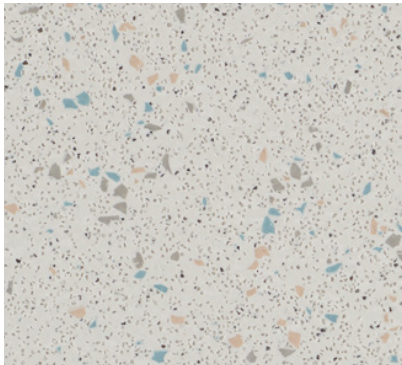


7724 Calcium
NCS: 2002-Y / LRV: 53.3

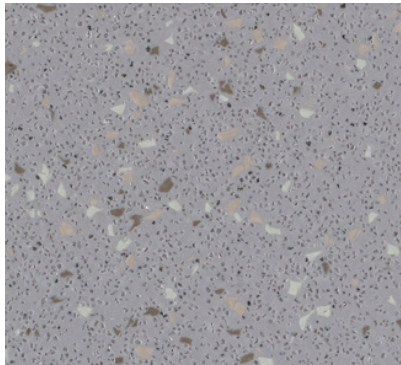


7792 Galena
NCS: 4502-B / LRV: 28.8

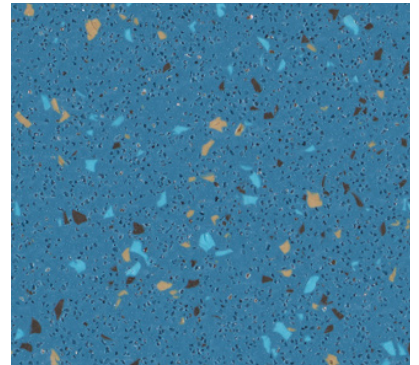


8420 Azurite
NCS: 4030-B / LRV: 17.1

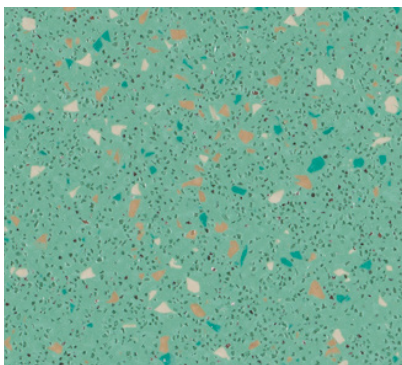

8592 Aventurine
NCS: 3030-G / LRV: 32.6

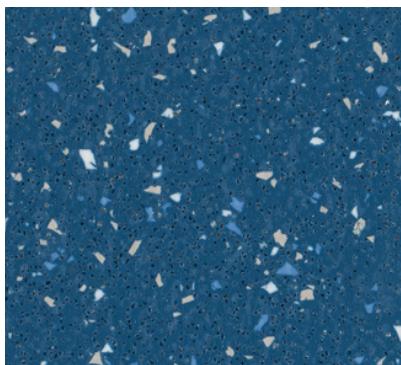

9127 Meteorite
NCS: 5030-R90B / LRV: 11.7

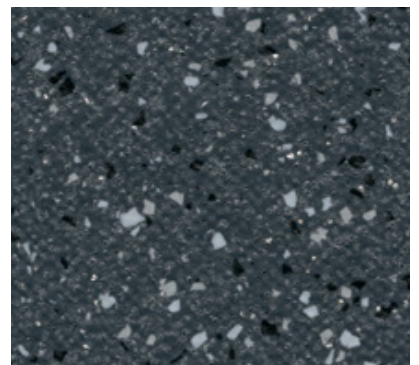

8717 Obsidian
NCS: 7502-B / LRV: 10.1



Tarasafe Standard



Compact sheet



Heavy traffic



R10

Slip Resistant

P4

Slip Resistant

SparClean®

Treated



Crystal inlay technology

Brighter, cleaner surface that adds real sparkle



Easier to install, lighter & more flexible to handle



Easier to cut – up to 5 x more blade life



Matte finish

Matte surface finish for an improved design experience

T

Wear group

High resistance to heavy traffic




29% recycled content
100% recyclable



7731 Marbre

NCS: 2002-B / LRV: 51.2

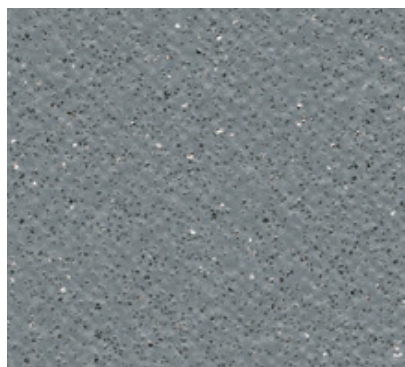

7773 Storm

NCS: 5502-B / LRV: 21.3



7801 Noir

NCS: 9000-N / LRV: 5.7



7677 Dove Grey

NCS: 3502-G / LRV: 34.1






7618 Edelweiss

NCS: 1505-Y10R / LRV: 57.9

NCS: Natural Colour System. - LRV: Light Reflectance Value. - Australian stock.






Order your Tarasafe
samples here

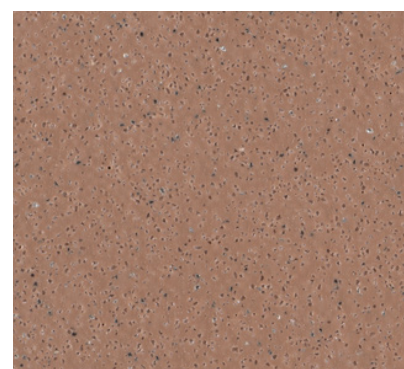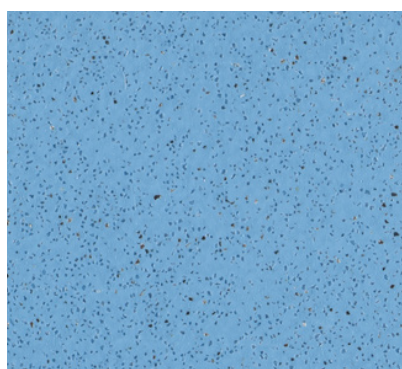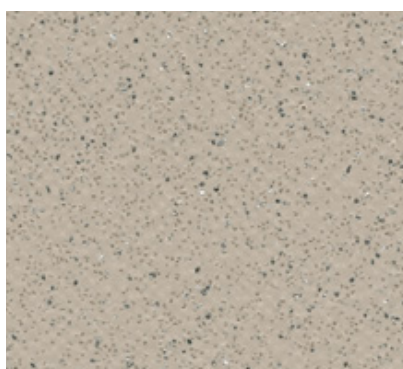

7386 Savana
NCS: 2005-Y50R / LRV: 44.3

2430 Rain Drop
NCS: 2040-R90B / LRV: 32.5



6084 Badian
NCS: 4020-Y70R / LRV: 20.9

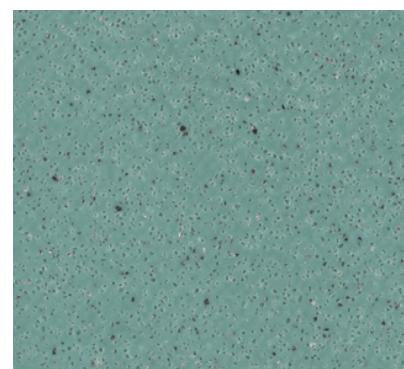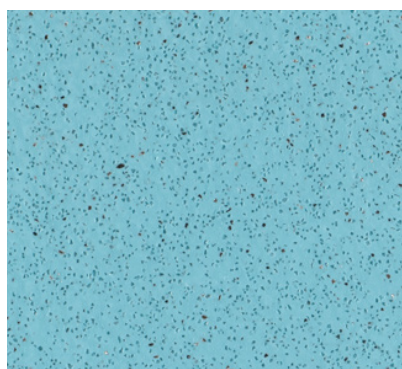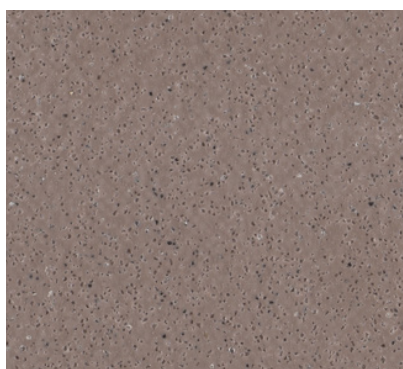

6085 Grizzly
NCS: 6005-Y80R / LRV: 19.2

6245 Atoll
NCS: 2030-B10G / LRV: 41.1

6589 Leaf
NCS: 4020-B90G / LRV: 25

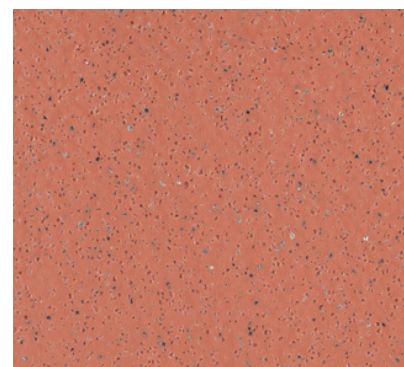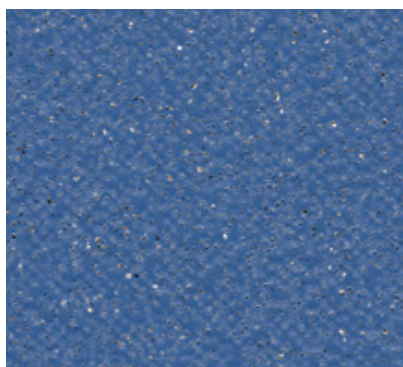

7709 Royal Blue
NCS: 4040-R80B / LRV: 15.3

7315 Jute
NCS: 3020-Y40R / LRV: 30.8

8102 Paprika
NCS: 3040-Y80R / LRV: 21.9

Tarasafe H₂O



0024 Peyto
NCS: 3000-N / LRV: 43.7



0025 Nile
NCS: 3010-Y50R / LRV: 43.4



Compact
sheet



Heavy traffic



R11

Slip Resistant

P5

Slip Resistant



**High performance slip
resistant safety flooring**
for wet and dry, barefoot
and shod applications.



0031 Eacham
NCS: 4005-Y50R / LRV: 34.3



0032 Malawi
NCS: 3005-Y50R / LRV: 40.1



Crystal inlay
technology

Brighter, cleaner surface
that adds real sparkle



Easier to cut – up to
5 x more blade life



Matte finish

Matte surface finish for an
improved design experience



Easier to install, lighter &
more flexible to handle



Wear group

High resistance to heavy traffic



Contains 29% recycled content
100% recyclable




0034 Zambezi
NCS: 5502-B / LRV: 19.9



0035 Bacalar
NCS: 4010-G30Y / LRV: 32.5



0033 Rhine
NCS: 4000-N / LRV: 29.7

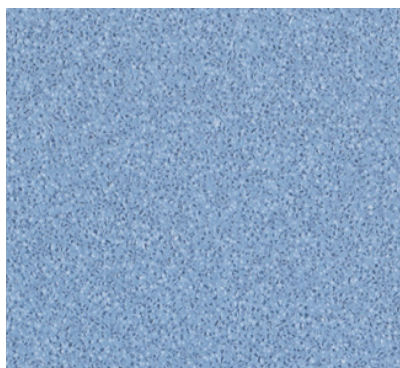

0036 Lagoa
NCS: 3020-R90B / LRV: 31.1



The Dementia Services Development
Centre at the University of Stirling
has approved Tarasafe H₂O for use
within a dementia-inclusive environment

Tarasafe Super



Compact sheet



Heavy traffic



R12

Slip Resistant

P5

Slip Resistant



Crystal inlay technology

Brighter, cleaner surface that adds real sparkle



Easier to install, lighter & more flexible to handle



Easier to cut – up to 5 x more blade life



Matte finish

Matte surface finish for an improved design experience



Wear group

High resistance to heavy traffic



100% recyclable & contains recycled materials



7386 Savana

NCS: 2005-Y20R / LRV: 44.0



7801 Noir

NCS: 9000-N / LRV: 5.7



7767 Dove Grey

NCS: 3502-G / LRV: 34.1



Tarasafe
STANDARD - H2O - ULTRA
ULTRA H2O - SUPER



Table with 8 columns: Description, EN ISO, Unit, Tarasafe Ultra, Tarasafe Ultra H2O, Tarasafe Standard, Tarasafe H2O, Tarasafe Super. Rows include Classification (European, Fire, Static electrical, Slip resistance) and Performance (Abrasion, Dimensional stability, etc.).

(1) The implementation of an effective cleaning method is the best defence against infection.

INSTALLATION should be carried out in accordance with local standards. The subfloor should be smooth, hard, clean, dry and free from contamination prior to laying.

MAINTENANCE should be carried out regularly to retain the appearance and durability of the floor. The floorcoverings should be maintained with regular sweeping and damp mopping.

To download the full Tarasafe range installation instructions, maintenance guides and certifications visit www.gerflor.com.au

ADHESIVES: Please refer to Gerflor Installation guidelines on gerflor.com.au
IMPORTANT Gerflor has a policy of continuous product and product data improvement. It reserves the right to change design and specifications without notice.

To download the full Tarasafe range installation instructions, maintenance guides and certifications visit www.gerflor.com.au

Manufactured using recycled card.
A sampling service is available for your convenience -1800 060 785
GERFLOR AUSTRALASIA PTY LTD
Tel: +613 9832 1333
Email: custorders@gerflor.com.au



we care / we act Our Commitments for a Sustainable future

Icons and text for sustainability commitments: Carbon Footprint, Biosourced Content, Recycled Content, Adhesive Free, Annual Volume Recycled.



* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution