



Looselay & Acoustic

Taralay Libertex

For fast track renovation

Gerflor®

Taralay Libertex

34


High traffic resistance
0.7mm wearlayer

19 dB

Comfort
Max³ Layer system

Circular Economy
100% recyclable product

Indoor Air Quality
Adhesive Free installation means virtually no VOC!

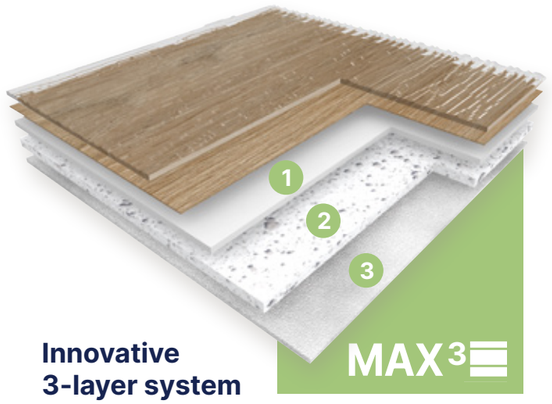


Innovative 3-layer system

1. High density foam complexed with fiber glass
2. Acoustic foam layer
3. Reinforced textile backing

Fast track renovation

No shutdown
No odor, no glue, minimum facility downtime

Renovation
on existing subfloor

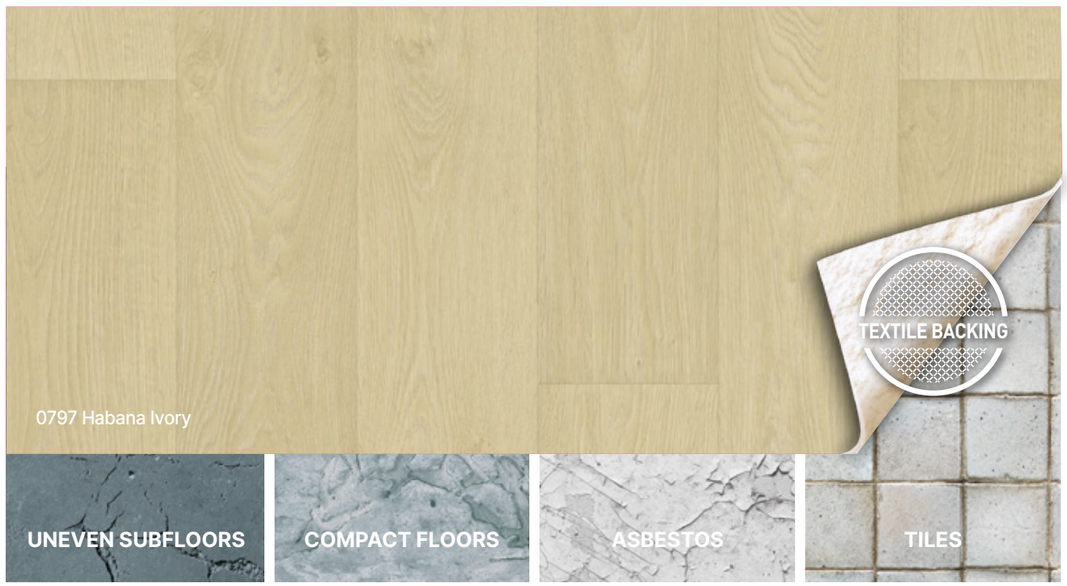



Taralay Libertex



2459 Chicago Haze
NCS: 2502-Y / LRV: 47.5



2284 Chicago Storm
NCS: 3502-R / LRV: 34.1



20 × 133.3 cm

2413 Cottage Blond
NCS: 4020-Y20R / LRV: 28.4



20 × 133.3 cm

2426 Cottage Brown
NCS: 5020-Y30R / LRV: 21.1



2460 Chicago Cream
NCS: 2005-Y30R / LRV: 53.2



2366 Chicago Sand
NCS: 3005-Y50R / LRV: 39.7



20 × 133.3 cm

2415 Cottage Clear
NCS:3010-Y20R / LRV: 36.1



2225 Rough Light Grey
NCS: 3500-N / LRV: 33.6



2218 Rough Taupe
NCS: 5005-Y80R / LRV: 19.4



2219 Rough Chocolate
NCS: 5005-Y50R / LRV: 19.0



25 × 25 cm

2226 Cordoba Black & White
NCS: 6502-Y / LRV: 30.4



2226 Cordoba Black & White / 2413 Cottage Blond

Taralay Libertex



20 × 133.3 cm

0797 Habana Ivory
NCS: 2005-Y50R / LRV: 52.7



10 × 100 cm

0636 Esterel Blond
NCS: 3020-Y20R / LRV: 32.6



16 × 100 cm

1751 Pure Oak Grey
NCS: 4502-Y / LRV: 33.5



16 × 100 cm

1442 Valencay Pecan
NCS: 4502-R / LRV: 24.2



20 × 133.3 cm

0828 Habana Beige
NCS: 4010-Y30R / LRV: 35.8



10 × 35 cm

2346 Azay Cream
NCS: 3010-Y40R / LRV: 37.9



2346 Azay Cream



16 × 100 cm

0720 Pure Oak Clear
NCS: 3010-Y40R / LRV: 41.2



16 × 100 cm

0179 Valencay Patine
NCS: 4005-Y20R / LRV: 36.2



16 × 100 cm

0368 Valencay Blond
NCS: 5020-Y30R / LRV: 21.2

Taralay Libertex

gerflor.com / follow us

Z0014549

			Taralay Libertex
Description			
Total thickness	EN ISO 24346	mm	3.65
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	2900
Width of sheet	EN ISO 24341	cm	200/400
Length of sheet	EN ISO 24341	lm	20
Phthalate free	-	-	OK
Classification			
Norm / Product specification	-	-	EN ISO 11638
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm^3	≤ 2.0
Wear group	-	group	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Room impact	NF S 31 074	dB	< 65
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	Protecsol®
Chemical products resistance(1)	EN ISO 26987	-	OK
Environment			
Recyclability	-	%	100
EPD	-	-	Available
Health			
Anti-bacterial activity(2)	ISO 22196	-	> 99% inhibits growth
Antiviral activity(3)	ISO 21702	-	> 99,7% virucidal activity
TVOC after 28 days	ISO 16000-6	microgram/m^3	< 100
Certification	-	-	Floorscore®
CE Marking			
CE	EN 14041		DS, C_{fl}-s1

(1) The implementation of an effective cleaning method is the best defence against infection. - (2) Anti-bacterial activity (E. coli - S. aureus MRSA) after 2h. The implementation of an effective cleaning regime is the most important defence against infection. - (3) Antiviral activity (Human coronavirus) after 2h. The implementation of an effective cleaning regime is the most important defence against infection.

Product description, technical data sheets, installation and Maintenance Guidelines available on our Gerflor websites.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/09/2025 and is subject to change at any time without notice.
In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

we **care** / we **act** our commitments for **2030**

climate
-30% CO_2
scopes 1, 2, 3 in tons eq. CO_2, vs 2019 Science Based Targets(1)

resources
75%
biobased, mineral & recycled(2)
30%
recycled content(3)

circularity
65 000
tons of waste treated(4)
45%
looselay(5)

health & well-being
100%
of our products perform better than Indoor Air Quality standards(6)
95%
sales covered by EPD(7)

people
30%
women(8)
40%
internal mobility(9)
Towards 0
accident(10)

More details: 1. Scopes 1, 2 & 3, in absolute value, market-based. Trajectory approved by SBTi (Science Based Targets Initiative). 2. Origin of raw materials for the entire Floor & Wall portfolio, on average, by weight; including 15% virgin salt, a primary element in vinyl manufacturing. Compared to 71% in 2024. 3. Average content in the Floor & Wall vinyl portfolio, by weight. Compared to 21% in 2024. 4. Recycled in our factories and recycling units. Compared to 59 040 tons in 2024. 5. % of Floor activity with non-glued products, easy to remove, easy to re-use. Compared to 40% in 2024. 6. 100% of vinyl and linoleum sold to the building market below 100 micrograms /m^3 (TVOC 28 days). 7. % of Floor & Wall activity covered by Environmental Product Declarations (EPD). Compared to 44% in 2024. 8. % women in our global workforce and among our managers. Compared to respectively 26% and 27% in 2024. 9. % job openings filled with internal hires worldwide. Compared to 25% in 2024. 10. Towards 0 accident: Lost time accident per million hours worked: below 3 vs 8,9 in 2024, for Gerflor employees worldwide.

8 €

Cover design: Chicago Haze / Cottage Blond - Non-contractual pictures including AI visuals - RC Lyon B 726 580 152 - jpe - 09/2025 - Z0014549 - Indicative documentation cost: