

STREAMO

MARINE FLOORINGS FOR SHIP INTERIORS



NEW
新系列

船用内装地板

EXPLORER

Gerflor®





STREAMO EXPLORER



High performing homogeneous multipurpose flooring 高性能多功能地面材料

27
COLORS
Non-directional
design
27个无方向性大理
石花纹的设计

20
Rolls 2 x 20 lm
卷材：2 x 20 lm

TVOC < 10 µg
after 28 days

**For medium
to heavy duty traffic**
适用于中型到重型交通
流量区域

100%
RECYCLABLE
100%
可循环利用



An exclusive and GERFLOR® patented special treatment
GERFLOR® 独家专利特殊维护处理

Evercare BY GERFLOR® GERFLOR® 处理技术



Gerflor®:
Even thickness
Gerflor® 均匀的厚度



100% non-porous surface
Simple and easy
stain removal
100% 无空隙，易于去除污渍

Other treated floor covering 其他处理的地板



Missing treatment
and uneven
thickness
无处理，厚度不均匀




Non-treated product
无处理产品



Stain Shield
防污



No wax for life
Water and detergent saving
终身无需打蜡
节约水和清洁剂



Matt effect: enhanced
design & color, long lasting
appearance
哑光效果：改进设计&花色，
外观持久



**Anti-bacterial &
anti-viral activity**
ISO 22196 & ISO 21702
抗菌抗病毒 ISO 22196 & ISO 21702


STREAMMO EXPLORER



5033 Candle



5037 Pomelo*

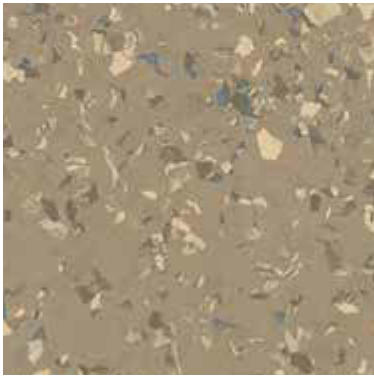

5018 Izmir*




5001 Miami

Welding rod: 05392060



5032 Clay*

Welding rod: 05392021

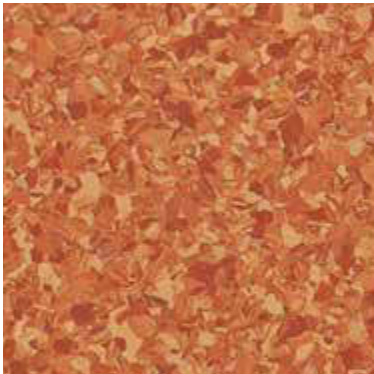

5036 Sunset*

Welding rod: 05390234

Welding rod: 05390054

Welding rod: 05391126

*MOQ is requested 需有最低起订量要求





5010 Mumbai

Welding rod: 05390048



5011 Genoa

Welding rod: 05392062



5004 Halifax

Welding rod: 05392061



5023 Parchment

Welding rod: 05394013




5029 Taffy*

Welding rod: 05394002

*MOQ is requested 需有最低起订量要求




STREAMO EXPLORER

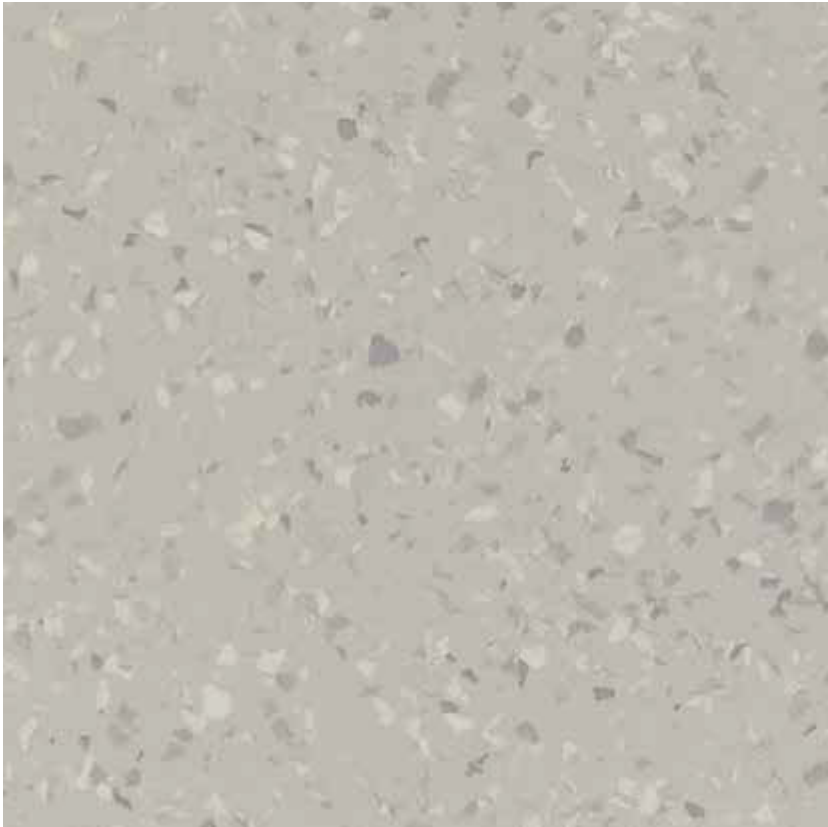

5021 Oyster Grey

Welding rod: 05395047

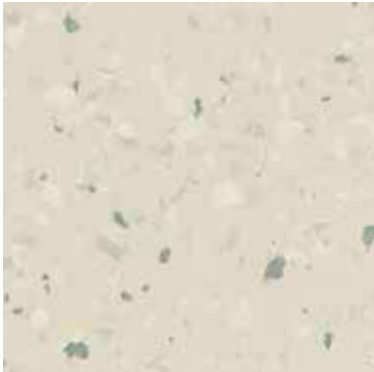

5022 Oat Grey

Welding rod: 05390811



5024 Antique

Welding rod: 05390242



5028 Marsh Green

Welding rod: 05391144



5027 Matcha Green*

Welding rod: 05392065

**MOQ is requested 需有最低起订量要求*






0575




5002 Adelaide

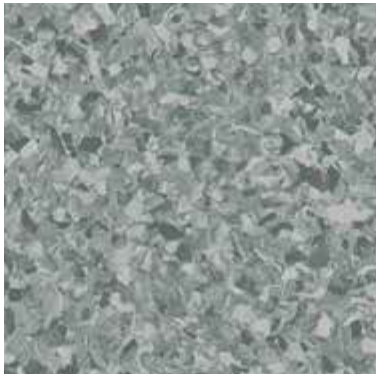


Welding rod: 05391123

5031 Fossil Grey

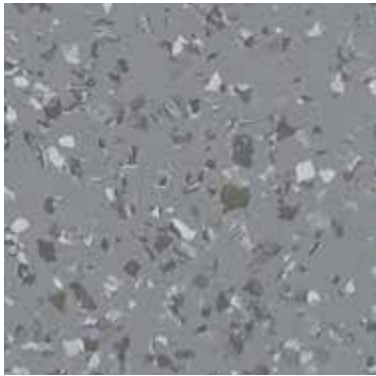

Welding rod: 05390155


5007 Marseille

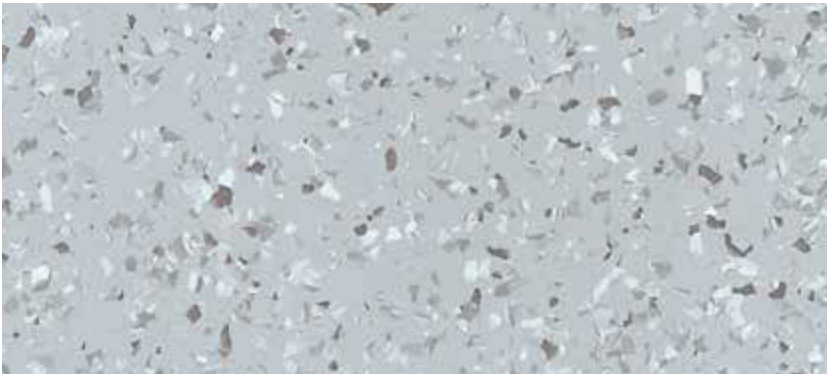

Welding rod: 05392053

Welding rod: 05390053

5016 Jurong

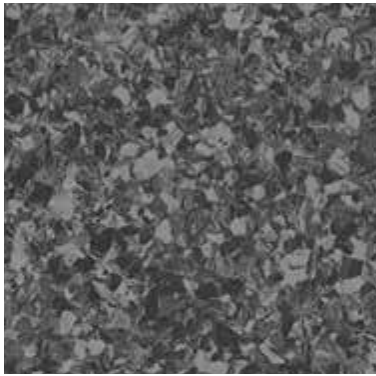


Welding rod: 05392050

5015 Tallin

**MOQ is requested 需有最低起订量要求*



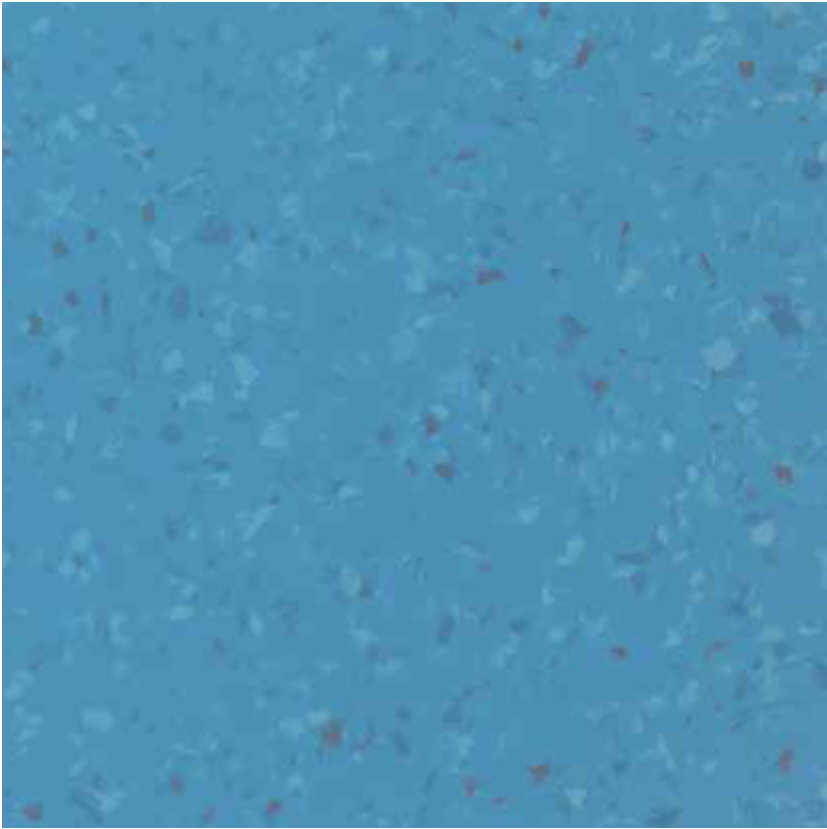


5025 Capri Blue

Welding rod: 05392067




5030 Celeste*

Welding rod: 05390125

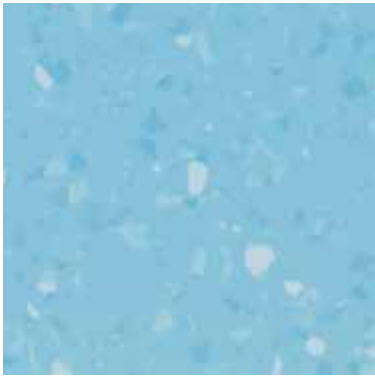


5026 Bubble Blue

Welding rod: 05392034

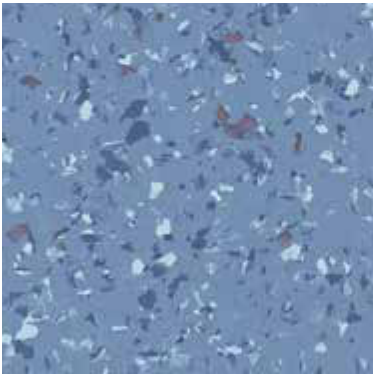


5008 Lubeck

Welding rod: 05390044

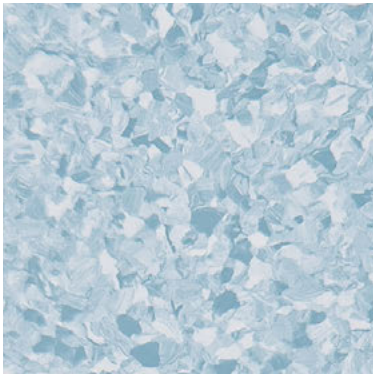

5034 Foggy Blue

Welding rod: 05392070

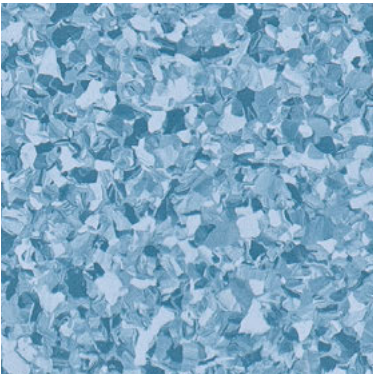

5035 Sapphire

Welding rod: 05391008



*MOQ is requested 需有最低起订量要求

STREAMO EXPLORER

STREAMO EXPLORER is a flexible homogeneous pressed compacted vinyl floorcovering in sheets, with non-directional design, color dyed as a raw mixture to ensure even color throughout the thickness and a matt finish. Its surface is densely compacted for improved wear resistance and ease of maintenance. It is suitable for heavy traffic areas.

The flooring is treated with EVERCARE, the polyurethane special treatment obtained by UV crossing-linking which provides excellent stain resistance, no wax for life.

STREAMO EXPLORER is anti-bacterial and fungicidal. The flooring complies with the IMO regulations.

STREAMO EXPLORER 是经过压延处理的致密型同质透心卷材，无方向性花纹设计，多彩混搭的碎花点缀贯穿整个地板厚度，并具有哑光效果。致密表层提供了优异的耐磨性能和易于清洁的产品特性，适用于人流量繁忙区域。

产品经过 EVERCARE 特殊维护处理技术，产品具有出色的抗污性能，终身无需打蜡。

STREAMO EXPLORER 具有抗菌防霉性能。该产品符合IMO相关规范。

			STREAMO EXPLORER
DESCRIPTION 规格			
Total thickness 总厚度	EN ISO 24346	mm	2
Weight 重量	EN ISO 23997	g/m²	3150
Width / Length of sheet 卷宽/卷长	EN ISO 24341	cm/lm	200/20
CLASSIFICATION 类别			
Norm / Product specification 产品规范	-	-	EN ISO 10581
Fire rating 防火等级	IMO认证	-	MSC 307(88) Part 5
			MSC 307(88) Part 2
	Maritime Approvals 海事认证	-	MED
			US Coast Guard
			Transport Canada
			SOLAS 74
Static electrical propensity 抗静电性	EN 1815	KV	≤2
PERFORMANCE 性能			
Wet slip resistance 防滑滑性	DIN EN 16165 Annex B	class	R9
Type binder content 粘合物分级	ISO 10581	type	II
Abrasion resistance 耐磨性	EN 660-2	mm³	≤ 4.0
Abrasion group 耐磨等级	EN 649	group	P
Dimensional stability 尺寸稳定性	EN ISO 23999	%	≤ 0.4
Residual indentation 残余凹陷度	EN ISO 24343-1	mm	≤ 0.1
Thermal conductivity 热传导性	EN ISO 10456	W/(m.K)	0.25
Colour fastness 颜色稳定性	EN ISO 105-B02	degree	≥ 6
Chemical products resistance 抗化学性	EN ISO 26987	-	OK
Anti-bacterial and fungicidal 抗菌防霉性能	-	-	OK
Special treatment 特殊维护处理	-	-	EVERCARE
TVOC after 28 days 28天后TVOC ⁽¹⁾ 排放量	ISO 16000 - 6	µg/m³	< 10

⁽¹⁾TVOC：挥发性有机化合物总排放量



Gerflor

Don't forget our complementary ranges!
了解我们更多的配件产品方案!



Gerflor® 洁弗乐®

GERFLOR CHINA
SHANGHAI BRANCH 上海分公司 Tel. / 电话: +86-21-63578818
streamobygerflor.com streamobygerflor.cn

NOV 11-30-2024 Version
Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.
Gerflor® 一直致力于产品和技术的不更新，我们保留对产品设计和技术说明的更新且恕不另行通知的权利。