


Taraflex® Bateco



- ① Surface made from 80% post manufacturing recycled waste

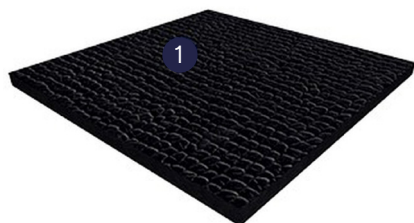

TARAFLEX®: THE REFERENCE SINCE 1947

Description

The moveable protection solution for sports floors during non-sporting activities.

- **1.5mm floor:** avoids markings from extra-sport use
- **Black colour:** sober design
- **Specific embossing:** avoids marking
- **Customisable length:** from 12 to 45lm
- **Easy installation and removal:** Can be unrolled over the floors and rolled up again before resuming sports activities.

🔧 Installation: Looselay

🔥 Fire rating: Bfl-s1

🕒 15 years warranty

Sustainability



80%
Recycled content



100% Recyclable



Made in Europe (France)

Complementary range

MOBILE OR STATIC
STORAGE RACKS




SINGLE-SIDED TAPE AND
UNROLLER



SERVING TROLLEYS



6801 BLACK

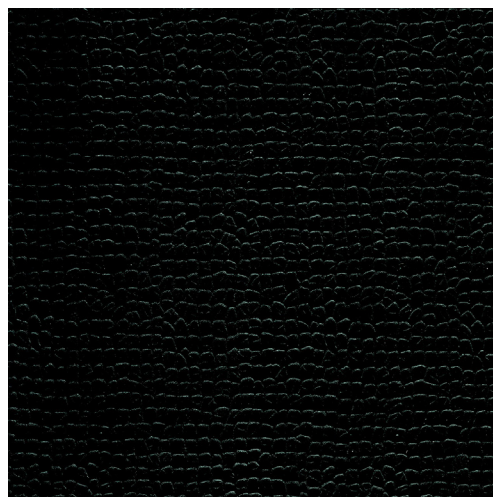

Technical Data Sheet

Description	Standard	Requirement	Units	Results
Surface treatment	-	-	-	-
Surface complex	-	-	-	-
Foam	-	-	-	-
Thickness	EN ISO 24346	-	mm	1.5
Weight	EN ISO 23997	-	kg/m ²	2.05
Length	EN ISO 24341	-	lm	from 12 to 45
Width	EN ISO 24341	-	lm	1.5
Sustainability				
Recycled content	-	-	%	80
Phthalate-free	-	-		Yes (except recycled content)
Recyclability	-	-	%	100
Technical characteristics				
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 300
Impact resistance	EN 1517	≥ 8	N/m	-
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
Dimensional stability	EN ISO 23999	-	%	1
Classification				
Fire	EN 13501-1	-	-	Bfl-s1
Anti-bacterial activity (1) (E. coli - S. aureus - MRSA)	ISO 22196	-	-	> 99% inhibits growth
Declaration of performance				
CE	DOP-005-1020-A	-	-	Fire

(1) The implementation of an effective cleaning method is the best defence against infection.

Others certifications:

